


# PBLC-M

# BALL-LOCK RECEPTACLE

**RHS** SUS

**IMAO**



Body
SUS630 stainless steel Precipitation hardened

Part Number	Proper Plate Thickness	Weight (g)	Proper Pneumatic Ball-Locking Clamps
<b>PBLC-M16-SUS</b>	6 or more	13	PBLC1023S-SUS, PBLC1023A-SUS

※Note: Spacing tolerance for multiple use should be  $\pm 0.1$ .  
Refer to the product pages of clamps for repeatability.

### Note

Color difference by the hardening treatment does not affect function or quality of the product.

### How To Install

#### ■ Hole Preparation

Plate thickness: 6mm to 10mm



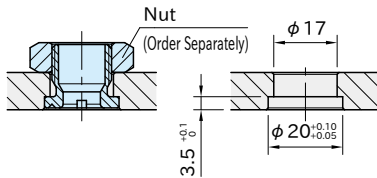


Plate thickness: over 10mm

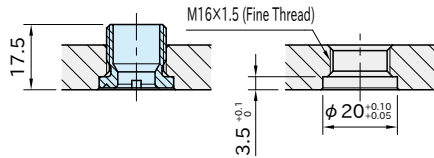

**Order Separately** Nut (Stainless Steel)

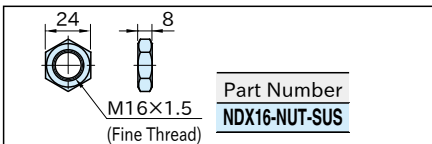

**Order Separately** Installation Wrench

